




# GENERAL BEARING IMPORT COMPANY

## 30256 NSK Double Direction Thrust Bearings

Bearing No. 30256

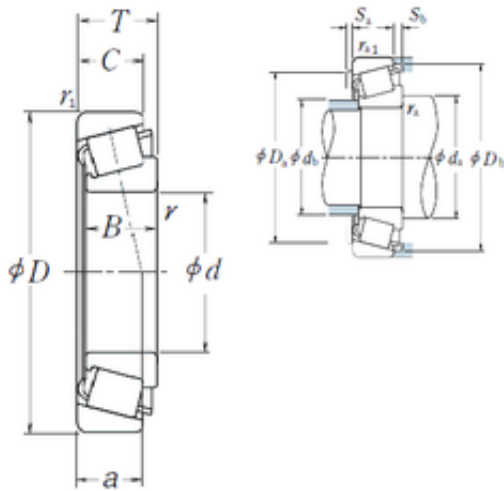

30256 Bearing 2D drawings and 3D CAD models

Size	280x500x89 mm
Bore Diameter	280 mm
Outer Diameter	500 mm
Width	89 mm
d	280 mm
D	500 mm
T	89 mm
B	80 mm
C	67 mm
a	98,5 mm
r min.	6 mm
r1 min.	5 mm
da min.	313 mm
Da min	436 mm
Da max.	478 mm
db max.	339 mm
Db min.	462 mm
ra max.	5 mm
rb max.	4 mm
Weight	66,3 Kg
Basic dynamic load rating (C)	1240 kN
Basic static load rating (C0)	1900 kN
(Grease) Lubrication Speed	630 r/min
(Oil) Lubrication Speed	850 r/min
Calculation factor (e)	0,44
Calculation factor (Y0)	0,74



## GENERAL BEARING IMPORT COMPANY

LangID	1
outer r	5
D_	500
TC-BET22	40
TC-BET21	3
TC-BET23	0
inner r	6
mass	66.3
GRS rpm	630
D_b	462
Cr	127000
TC-RA	805.444
DE_	441.847
T-ALP23	0
db	339
T-ALP22	0
Prod_Type3	TRBSR_MD_A
da	313
T-ALP21	33
Iso	-
ALPHA_	16.5
SDM_	393.618
SBRG	2
D_a2	436
hidYobi	30256
Y1	1.4
D_a1	478
B_	80
hidTable	ecat_NSTPRM
Oil rpm	850
C0r	194000
Y0	0.74



## GENERAL BEARING IMPORT COMPANY

TC-SLR	56
inner ra	5
outer rb	4
C0	1900
Sa	12
Sb	22
e	0.44
DA_	49.755
Z_	20
C_	67
yobi	30256
TC-DA1	51.533
TC-DA2	47.977
KBRG	3111
DI_	345.389