




GENERAL BEARING IMPORT COMPANY

32968 NSK Double Direction Thrust Bearings

Bearing No. 32968

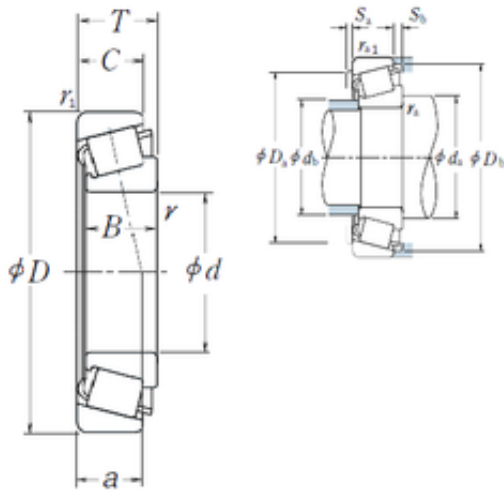

32968 Bearing 2D drawings and 3D CAD models

Size	340x460x76 mm
Bore Diameter	340 mm
Outer Diameter	460 mm
Width	76 mm
d	340 mm
D	460 mm
T	76 mm
B	72 mm
C	63 mm
a	89,2 mm
r min.	4 mm
r1 min.	3 mm
da min.	361 mm
Da min	426 mm
Da max.	446 mm
db max.	364 mm
Db min.	446 mm
ra max.	3 mm
rb max.	2,5 mm
Weight	33,6 Kg
Basic dynamic load rating (C)	910 kN
Basic static load rating (C0)	1940 kN
(Grease) Lubrication Speed	630 r/min
(Oil) Lubrication Speed	850 r/min
Calculation factor (e)	0,41
Calculation factor (Y0)	0,8



GENERAL BEARING IMPORT COMPANY

LangID	1
outer r	3
D_	460
TC-BET22	0
TC-BET21	2
TC-BET23	0
inner r	4
mass	33.6
GRS rpm	630
D_b	446
Cr	93000
TC-RA	830.668
DE_	428.528
T-ALP23	0
db	364
T-ALP22	50
Prod_Type3	TRBSR_MD_A
da	361
T-ALP21	30
Iso	-
ALPHA_	15.417
SDM_	400.956
SBRG	29
D_a2	426
hidYobi	32968
Y1	1.5
D_a1	446
B_	72
hidTable	ecat_NSTPRM
Oil rpm	850
C0r	197000
Y0	0.8



GENERAL BEARING IMPORT COMPANY

TC-SLR	52
inner ra	3
outer rb	2.5
C0	1940
Sa	13
Sb	13
e	0.41
DA_	28.089
Z_	35
C_	63
yobi	32968
TC-DA1	28.994
TC-DA2	27.183
KBRG	3111
DI_	373.384